


MODEL 20A

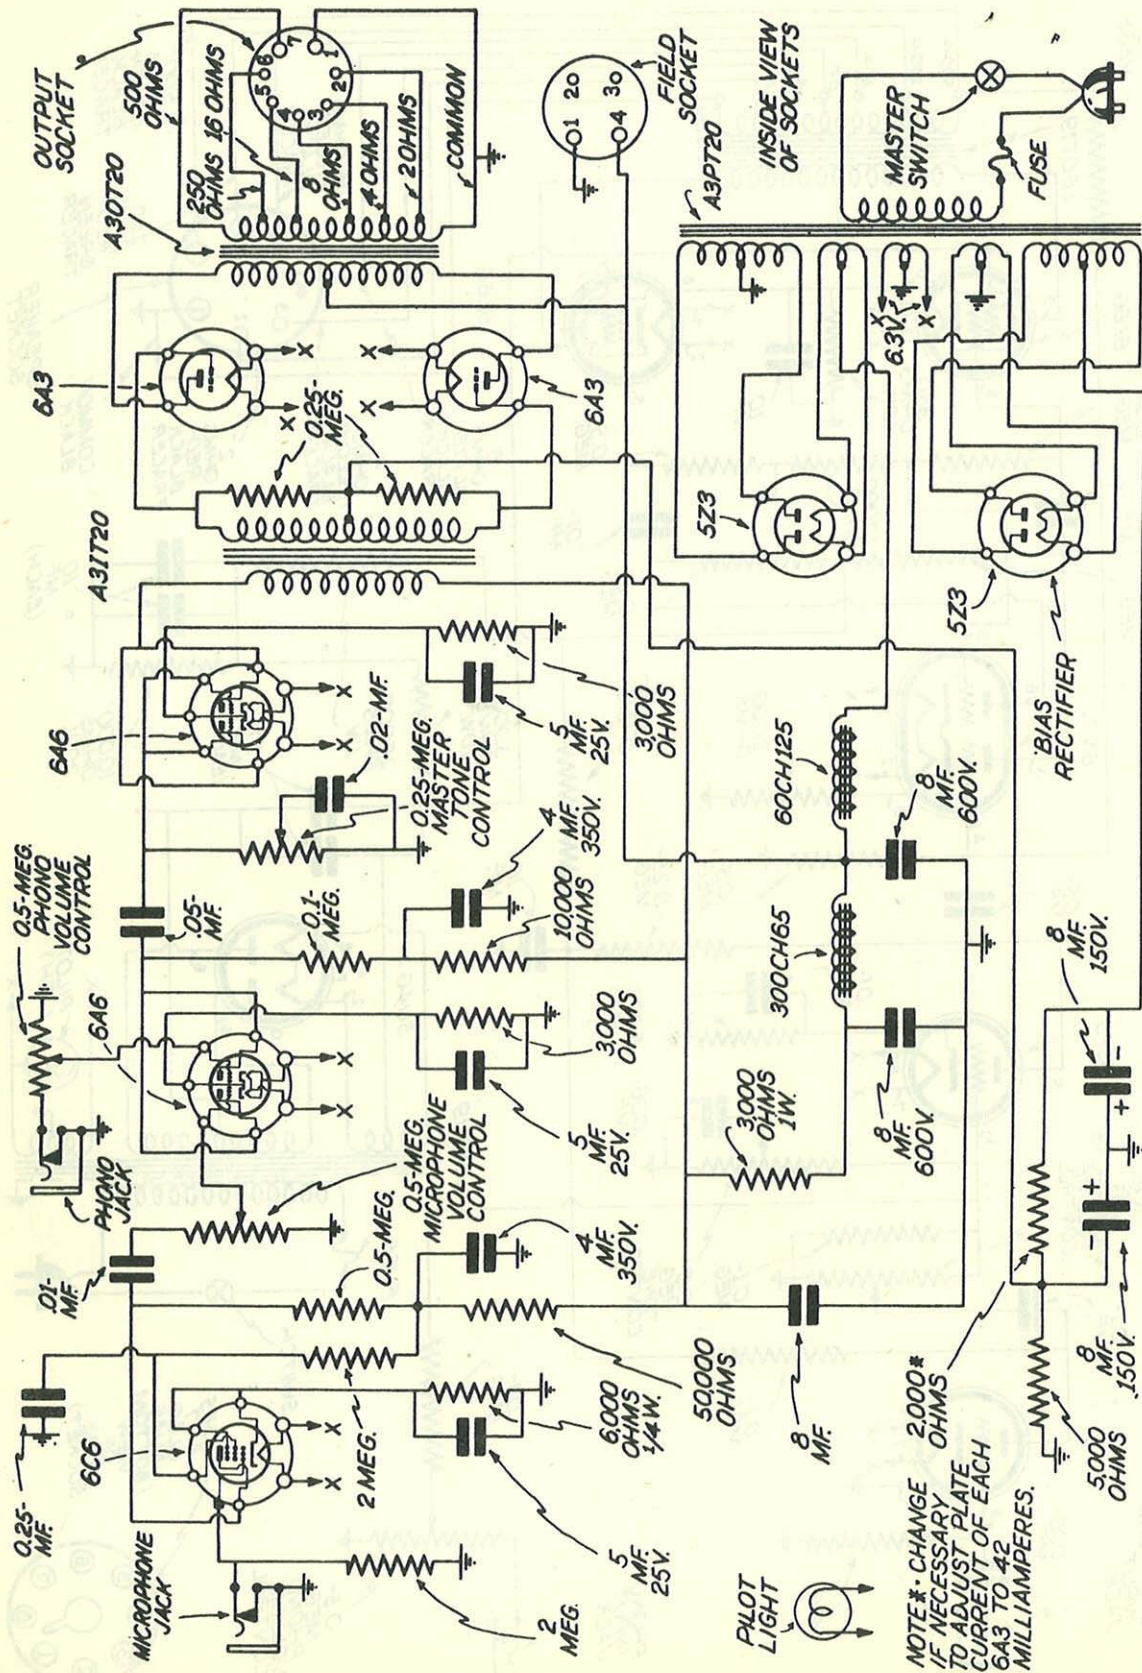

NOTE* - CHANGE 2,000*
IF NECESSARY
TO ADJUST PLATE
CURRENT OF EACH
6A3 TO 42
MILLIAMPERES.